




AUMSHIVAY ENGINEERING PRIVATE LIMITED

- B-21, Bhan Nagar, Queens Road, Jaipur-302021
- Website: www.aumshivay.com, www.omengineering.in
 - E-mail:admin@aumshivay.com

D-Shackle Screw Pin type

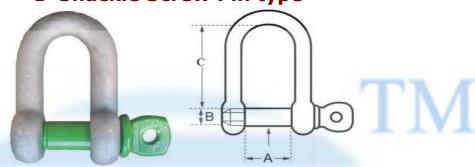

Product	Description	Technical Detail						
D-Shackle	Screw Pin type D-Shackles have a threaded pin is		Nominal	W.L.L	Dimensions (Inch)			Weight (kg/pc)
Screw Pin Type	inserted through the ears and tightened down. Screw pin shackles are quick and easy to connect and disconnect so they're convenient for rigging, that is used for "pick and place" applications or		size					
			(Inch)	(Ton)	A	В	С	G210
			3/16	1/3	0.38	0.25	0.75	0.02
			1/4	1/2	0.47	0.31	0.88	0.05
			5/16	3/4	0.53	0.38	1.03	0.08
	when slings and other hardware are often changed		3/8	1	0.66	0.44	1.25	0.13
	out that is narrower than anchor shackles. Because		7/16	1.1/2	0.75	0.5	1.44	0.2
	these shackles are designed and rated for in-line		1/2	2	0.81	0.63	1.63	0.27
	tension, they should not be side loaded.		5/8	3.1/4	1.06	0.75	2	0.57
			3/4	4.3/4	1.25	0.88	2.38	1.19
		٠	7/8	6.1/2	1.44	1	2.81	1.43
			1	8.1/2	1.69	1.13	3.19	2.15
			1.1/8	9.1/2	1.81	1.25	3.58	3.06
			1.1/4	12	2.03	1.38	3.94	4.11
			1.3/8	13-1/2	2.25	1.5	4.38	5.28
			1.1/2	17	2.38	1.63	4.81	7.23
			1.3/4	25	2.88	2	5.75	12.13
			2	35	3.25	2.25	6.75	19.19
			2.1/2	55	4.13	2.75	8	32.27
			3	85	5	3.25	8.5	42.5

Features:

- ➤ WLL Capacity -1/3 Ton to 85 Ton.
- > Forged Quenched and Tempered with alloy pins.
- Working Load Limit permanently shown on every shackle.
- Lock for the pin, the mark of the genuine quality.
- > Shackles can finished be proof tested with certificates, Charges for proof testing & certification available when requested at the time of order.
- > Shackles are galvanized.

Applications:

> Screw pin shackles can be used in applications where side loading is present, and with multi-leg sling assemblies. However, reduction to the WLL must be accounted for when used in a side-loading situation.



PAGE. 1