



- B-21, Bhan Nagar, Queens Road, Jaipur-302021
- Website: [www.aumshivay.com](http://www.aumshivay.com), [www.omengineering.in](http://www.omengineering.in)
- E-mail: [admin@aumshivay.com](mailto:admin@aumshivay.com)


## Manila Rope Pulley Block




TM

**Manila Rope Pulley Block;** Manila Rope or Fibre Rope Pulley Blocks are available in Single, Double & Triple Sheaves are used with 0.5 to 2.0 Inch diameter Natural and Synthetic Fibre Ropes. These Pulley Blocks available with Laser Cut Side Plates and Grade 5 Bolts Secured with Lock Washers and Staked nuts; Bronze Bushed Sheaves with larger bearing diameter for extended block life.

A. Manila Rope Pulley Block (Single Sheave)			
Dia. of Sheave	Dia of Rope (Inch)	S.W.L (Ton)	No. Sheave
3½"	1/2"	0.1	Single
4"	5/8"	0.15	Single
4¾"	3/4"	0.2	Single
6"	1"	0.5	Single
7"	1¼"	0.6	Single
8"	1½"	1.0	Single
10"	2"	1.5	Single

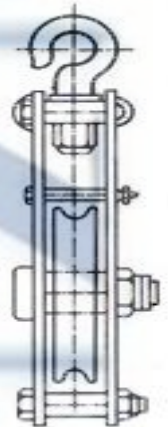


B. Manila Rope Pulley Block (Double Sheave)			
Dia. of Sheave	Dia of Rope (Inch)	S.W.L (Ton)	No. Sheave
3½"	1/2"	0.15	Double
4"	5/8"	0.2	Double
4¾"	3/4"	0.4	Double
6"	1"	1.0	Double
7"	1¼"	1.5	Double
8"	1½"	2.0	Double
10"	2"	2.5	Double

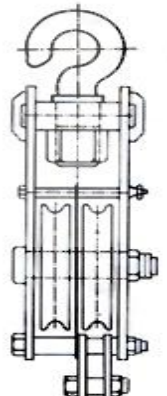



- B-21, Bhan Nagar, Queens Road, Jaipur-302021
- Website: [www.aumshivay.com](http://www.aumshivay.com), [www.omengineering.in](http://www.omengineering.in)
- E-mail: [admin@aumshivay.com](mailto:admin@aumshivay.com)

C. Manila Rope Pulley Block (Triple Sheave)			
Dia. of Sheave	Dia of Rope (Inch)	S.W.L. (Ton)	No. Sheave
3½"	1/2"	0.25	Triple
4"	5/8"	0.3	Triple
4¾"	3/4"	0.5	Triple
6"	1"	1.5	Triple
7"	1¼"	2.0	Triple
8"	1½"	2.5	Triple
10"	2"	4.0	Triple

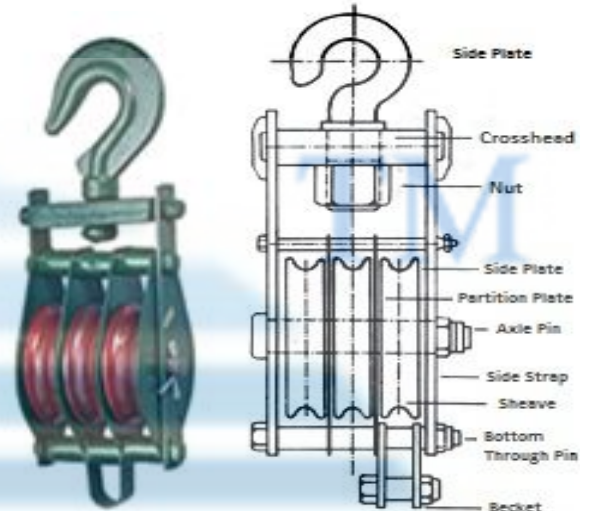

## Features:

- These blocks are built to carry the increased loads of synthetic fiber ropes.
- All hooks are heat-treated alloy steel.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these blocks meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.