


- B-21, Bhan Nagar, Queens Road, Jaipur-302021
- Website: www.aumshivay.com, www.omengineering.in
- E-mail: admin@aumshivay.com


SCREW DRIVERS & TESTERS

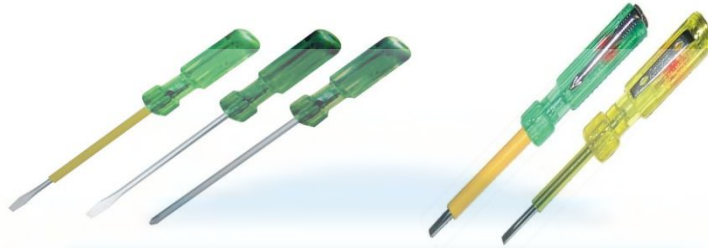

Screw Drivers & Sets: We deals with most comprehensive range of Screw Drivers are made up of high grade Steel & Transparent green cellulose acetate handle. The handle is made from high grade C. A. Plastic which is non flammable and unaffected by oil petrol, grease, water etc. These are available in wide variety of different tip size & length. It is Generally Conforming to IS 844-1979.

FLAT SCREW DRIVERS


| PROD. NO | DIMENSIONS | | | | | |
|----------|------------------|-----|----|-----|-----|--------|
| | TIP SIZE (B x T) | A | C | D | L | WT.GMS |
| 932 | 0.6 x 0.4 | 50 | 13 | 3 | 110 | 10 |
| 933 | 1.6 x 0.4 | 75 | 13 | 3 | 135 | 12 |
| 911 | 3.0 x 0.4 | 50 | 13 | 3 | 110 | 10 |
| 901 | 3.0 x 0.5 | 75 | 17 | 3 | 150 | 21 |
| 902 | 3.0 x 0.4 | 100 | 17 | 3 | 175 | 22 |
| 912 | 3.5 x 0.5 | 75 | 14 | 3.5 | 140 | 16 |
| 842 | 3.5 x 0.5 | 150 | 17 | 3.5 | 225 | 35 |
| 913 | 4.0 x 0.6 | 100 | 18 | 4 | 18 | 30 |
| 712 | 4.0 x 0.6 | 125 | 17 | 4 | 200 | 30 |
| 833 | 4.0 x 0.6 | 200 | 18 | 4 | 280 | 40 |
| 713 | 5.0 x 0.6 | 75 | 18 | 5 | 155 | 35 |
| 936 | 5.0 x 0.8 | 150 | 22 | 5 | 236 | 60 |
| 921 | 6.0 x 0.6 | 75 | 22 | 6 | 161 | 55 |
| 922 | 6.0 x 6.0 | 100 | 22 | 6 | 186 | 60 |
| 923 | 6.0 x 0.8 | 125 | 22 | 6 | 211 | 62 |
| 824 | 6.0 x 0.8 | 150 | 22 | 6 | 236 | 65 |
| 825 | 6.0 x 0.8 | 200 | 22 | 6 | 286 | 77 |
| 826 | 6.0 x 0.8 | 250 | 22 | 6 | 336 | 90 |
| 924 | 8.0 x 1.2 | 125 | 28 | 8 | 230 | 115 |
| 925 | 8.0 x 1.2 | 150 | 28 | 8 | 255 | 130 |
| 926 | 8.0 x 1.2 | 175 | 28 | 8 | 280 | 130 |
| 827 | 8.0 x 1.2 | 200 | 28 | 8 | 305 | 145 |
| 828 | 8.0 x 1.2 | 250 | 28 | 8 | 355 | 165 |
| 829 | 8.0 x 1.2 | 300 | 28 | 8 | 405 | 180 |
| 725 | 10.0 x 1.2 | 150 | 26 | 8 | 248 | 120 |
| 927 | 10.0 x 1.2 | 200 | 34 | 10 | 327 | 245 |
| 928 | 10.0 x 1.2 | 250 | 34 | 10 | 377 | 275 |
| 929 | 10.0 x 1.5 | 300 | 34 | 10 | 427 | 310 |
| 930 | 10.0 X 1.5 | 400 | 34 | 10 | 527 | 365 |
| 931 | 13.0 x 1.9 | 450 | 34 | 10 | 577 | 395 |

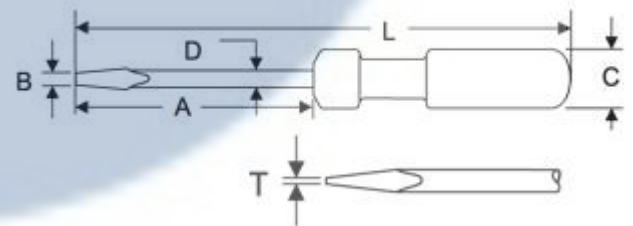

- B-21, Bhan Nagar, Queens Road, Jaipur-302021
- Website: www.aumshivay.com, www.omengineering.in
- E-mail: admin@aumshivay.com



INSULATED SCREW DRIVER

| PROD. NO | DIMENSIONS (MM) | | | | | |
|----------|------------------|-----|----|-----|-----|--------|
| | TIP SIZE (B x T) | A | C | D | L | WT.GMS |
| 822 I | 3.5 x 0.5 | 125 | 17 | 3.5 | 200 | 30 |
| 842 I | 3.5 x 0.5 | 150 | 17 | 3.5 | 225 | 35 |
| 832 I | 3.5 x 0.5 | 200 | 17 | 3.5 | 275 | 40 |
| 823 I | 3.4 x 0.6 | 150 | 18 | 4 | 230 | 40 |
| 833 I | 4.0 x 0.6 | 200 | 18 | 4 | 280 | 40 |
| 934 I | 5.0 x 0.6 | 100 | 22 | 5 | 186 | 50 |
| 935 I | 5.0 x 0.6 | 125 | 22 | 5 | 211 | 55 |
| 936 I | 5.0 x 0.8 | 150 | 22 | 5 | 236 | 60 |
| 937 I | 5.5 x 0.6 | 200 | 22 | 5 | 286 | 70 |
| 938 I | 5.0 x 0.8 | 250 | 22 | 5 | 336 | 80 |
| 939 I | 5.0 x 0.8 | 300 | 22 | 5 | 386 | 90 |
| 824 I | 6.0 x 0.8 | 150 | 22 | 6 | 236 | 65 |
| 825 I | 6.0 x 0.8 | 200 | 22 | 6 | 286 | 77 |
| 826 I | 6.0 x 0.8 | 250 | 22 | 6 | 336 | 90 |
| 827 I | 8.0 x 1.2 | 200 | 28 | 8 | 305 | 145 |
| 829 I | 8.0 x 1.2 | 300 | 28 | 8 | 405 | 180 |
| 928 I | 10.0 x 1.2 | 250 | 34 | 10 | 377 | 275 |

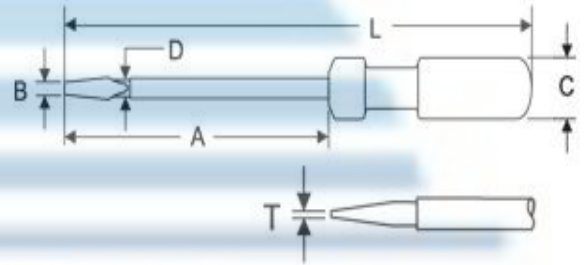

PHILIPS SCREW DRIVERS


| PROD. NO | DIMENSIONS (MM) | | | | | |
|------------|------------------|-----|----|----|-----|---------|
| | TIP SIZE (B x T) | A | C | D | L | WT. GMS |
| P3 859 50 | 0 | 50 | 13 | 3 | 108 | 15 |
| P3 860 60 | 0 | 60 | 17 | 3 | 135 | 20 |
| P3 860 150 | 0 | 150 | 17 | 3 | 225 | 25 |
| P5 861 75 | 1 | 75 | 22 | 3 | 160 | 50 |
| P5 861 100 | 1 | 100 | 22 | 5 | 185 | 55 |
| P5 861 150 | 1 | 150 | 22 | 5 | 235 | 60 |
| P5 861 200 | 1 | 200 | 22 | 5 | 285 | 65 |
| P6 862 100 | 2 | 100 | 22 | 6 | 198 | 80 |
| P6 862 150 | 2 | 150 | 26 | 6 | 248 | 95 |
| P6 862 200 | 2 | 200 | 26 | 6 | 298 | 110 |
| P6 862 250 | 2 | 250 | 26 | 6 | 348 | 125 |
| P6 862 300 | 2 | 300 | 26 | 6 | 398 | 140 |
| P8 863 150 | 3 | 150 | 28 | 8 | 255 | 155 |
| P8 863 200 | 3 | 200 | 28 | 8 | 305 | 175 |
| P8 863 250 | 3 | 250 | 28 | 8 | 355 | 195 |
| P8 863 300 | 3 | 300 | 28 | 8 | 405 | 215 |
| P1 864 200 | 4 | 200 | 34 | 10 | 327 | 250 |

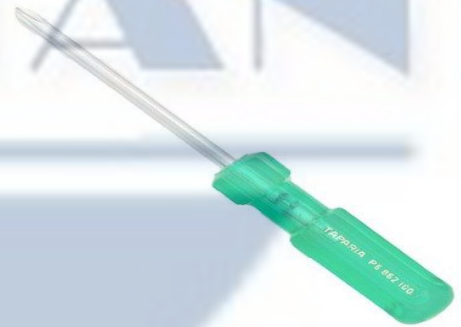

- B-21, Bhan Nagar, Queens Road, Jaipur-302021
- Website: www.aumshivay.com, www.omengineering.in
- E-mail: admin@aumshivay.com


STUBBY SCREW DRIVERS

| PROD. NO | DIMENSIONS (MM) | | | | | WT. GMS |
|----------|-------------------|----|----|---|-----|---------|
| | TIP SIZE B x T | A | C | D | L | |
| 855 | 6.0 PHILIPS NO. 2 | 50 | 30 | 6 | 100 | 45 |

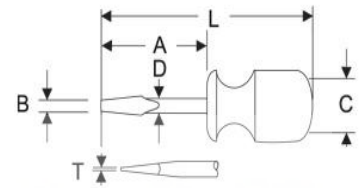



TWO-IN-ONE STUBBY SCREW DRIVERS

| PROD. NO | A | C | D | L | TIP SIZE | TIP SIZE | L1 | WT. |
|----------|----|----|---|-----|-----------|-----------------|----|-----|
| | | | | | D1 x T1 | D2 x T1 | | GMS |
| 974 | 95 | 22 | 6 | 180 | 6.0 x 0.8 | 6.0 x 2 PHILIPS | 75 | 55 |

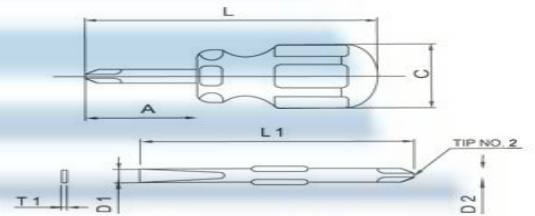

TWO-IN-ONE SCREW DRIVERS


| PROD. NO | DIMENSIONS (MM) | | | | | L1 | WT. GMS |
|----------|-----------------|----|-----|-----------------|------------------|-----|---------|
| | A | C | L | TIP SIZE D1xT1 | TIP SIZE D2xT1 | | |
| 803 | 55 | 17 | 130 | 3.5 x 0.5 | 3.5 x 0 PHILIPS | 122 | 25 |
| 804 | 75 | 18 | 155 | 5.0 x 0.8 | 5.0 x 1 PHILIPS | 122 | 40 |
| 810 | 60 | 14 | 125 | 2.3 x 0.4 | 25 x 00 PHILIPS | 110 | 20 |
| 850 | 200 | 22 | 284 | 3.5 x 0 PHILIPS | 5.0 x 1 PHILIPS | 250 | 80 |
| 851 | 200 | 25 | 396 | 5.0 X 1 PHILIPS | 6.0 x 2 PHILIPS | 250 | 105 |
| 852 | 200 | 27 | 313 | 6.0 x 2 PHILIPS | 8.0 x 3 PHILIPS | 255 | 170 |
| 903 I | 250 | 23 | 342 | 6.0 x 0.8 | 2.5 x 00 PHILIPS | 300 | 100 |
| 904 | 100 | 23 | 192 | 6.0 X 0.7 | 50 X 1 PHILIPS | 150 | 60 |
| 905 | 140 | 23 | 232 | 6.0 X 0.8 | 6.0 X 2 PHILIPS | 190 | 70 |
| 906 | 140 | 27 | 245 | 8.0 X 0.9 | 8.0 X 3 PHILIPS | 205 | 115 |
| 907 | 200 | 23 | 292 | 6.0 X 0.8 | 6.0 X 2 PHILIPS | 250 | 95 |

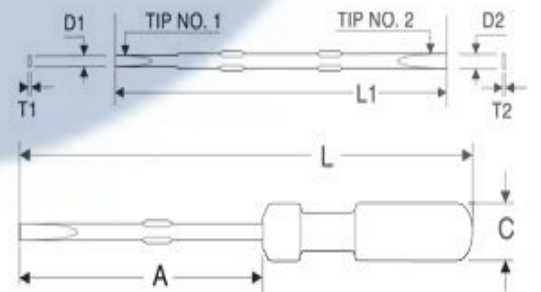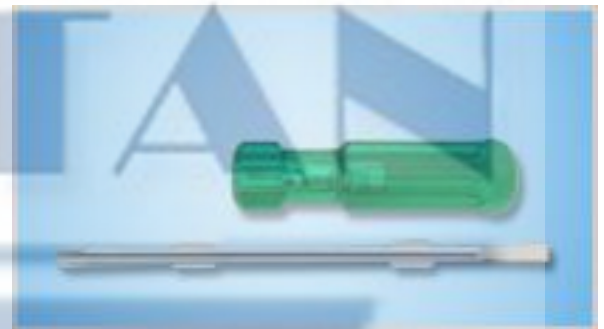

- B-21, Bhan Nagar, Queens Road, Jaipur-302021
- Website: www.aumshivay.com, www.omengineering.in
- E-mail: admin@aumshivay.com

TORX SCREW DRIVERS

| PROD. NO. | DIMENSIONS (MM) | | | | WT.GMS |
|-----------|-----------------|----|-----|-----|--------|
| | A | C | D | L | |
| T-5 | 75 | 17 | 3 | 140 | 22 |
| T-5L | 150 | 17 | 3 | 215 | 28 |
| T-6 | 75 | 17 | 3 | 150 | 22 |
| T-6L | 150 | 17 | 3 | 225 | 28 |
| T-8 | 75 | 17 | 3.5 | 150 | 25 |
| T-8L | 150 | 17 | 3.5 | 225 | 35 |
| T-10 | 75 | 17 | 3.5 | 150 | 25 |
| T-10L | 150 | 17 | 3.5 | 225 | 35 |
| T-15 | 75 | 22 | 5 | 161 | 50 |
| T-15L | 150 | 22 | 5 | 236 | 60 |
| T-20 | 100 | 22 | 5 | 186 | 55 |
| T-20L | 200 | 22 | 5 | 286 | 65 |
| T-25 | 100 | 26 | 6 | 198 | 90 |
| T-25 L | 200 | 26 | 6 | 298 | 105 |
| T-30 | 100 | 26 | 6 | 198 | 90 |
| T-30 L | 200 | 26 | 6 | 298 | 105 |
| T-40 | 125 | 28 | 8 | 230 | 120 |
| T-40 L | 200 | 28 | 8 | 305 | 150 |

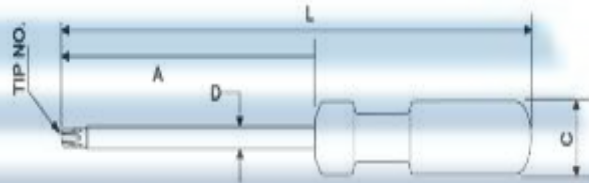


STRIKING SCREW DRIVERS

| PROD. NO. | DIMENSIONS | | | | WT.GMS |
|-----------|------------|----|---|-----|--------|
| | A | C | D | L | |
| OGS 8210 | 75 | 17 | 3 | 140 | 22 |
| OGS 8260 | 150 | 17 | 3 | 215 | 28 |
| OGS 1200 | 75 | 17 | 3 | 150 | 22 |
| OGS 1250 | 150 | 17 | 3 | 225 | 28 |



POKER SCREW DRIVER

| PROD. NO. | TIP SIZE B X T | DIMENSIONS | | | | WT. GMS |
|-----------|-------------------|------------|----|---|-----|---------|
| | | A | C | D | L | |
| 871 | SQ POKER | 95 | 22 | 6 | 180 | 55 |



- B-21, Bhan Nagar, Queens Road, Jaipur-302021
- Website: www.aumshivay.com, www.omengineering.in
- E-mail: admin@aumshivay.com

PRECISION SCREW DRIVER SET

| PROD. NO | CONTENTS |
|----------|---|
| PSFP6 | Precision Screw Driver Set (6 Pcs.) (Containing flat 1.4mm, 2.0mm Tip 2.4mm, 3.0mm & PHILIPS Tip no. 1&2) |
| PSF6 | Precision Screw Driver Set (6 Pcs.) (Containing flat 0.8mm, 1.0mm Tip 1.2mm, 1.6mm & 2.0mm & 2.5mm) |
| PST6 | Precision Screw Driver Set (6 Pcs.) (Containing flat 1.4mm, 2.0mm) |





SCREW DRIVER SET WITH NEON BULB

| PROD. NO | CONTENTS | NO OF BLADES |
|----------|--|--------------|
| 802 | 6.0 x 0.8, 3.5 x 0.5, PHILIPS 0, Square Poker, PHILIPS 1 | 5 |
| 812 | 6.0 x 0.8, 3.5 x 0.5, PHILIPS 0, Square Poker, PHILIPS 1 | 5 |
| 831 | 3.5 x 0.5, 4.3 x 0.6, 6 x 0.8, PHILIPS No. 1, PHILIPS No. 2, Poker Round, Poker Sq., Wooden Screw Type | 8 |
| 840 | 6.0x0.8, 3.5x0.5, PHILIPS 0, Square Poker. PHILIPS 1 + Extension Road | 6 |



LINE TESTERS

| PROD. NO. | HANDLE | DIMENSIONS (MM) | | | | | WT. GMS |
|-----------|--------|-----------------|-------------------|----|---|-----|---------|
| | | A | TIP SIZE B x T | C | D | L | |
| 813 | Yellow | 55 | 3.5 x 0.4 | 17 | 6 | 130 | 25 |
| 814 | Green | 60 | 3.5 x 0.5 | 14 | 6 | 125 | 20 |
| 815 | Green | 100 | 3.5 x 0.5 | 18 | 6 | 180 | 35 |
| 816 | Yellow | 95 | 3.5 x 0.5 | 17 | 6 | 170 | 35 |
| 818 | Yellow | 60 | SQ. POKER | 14 | 6 | 125 | 20 |
| 873 | Yellow | 114 | 4.0 X 0.6 | 18 | 4 | 200 | 30 |

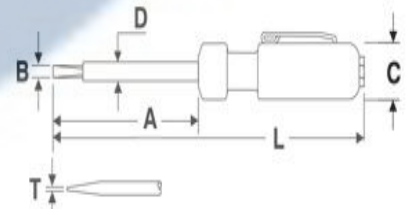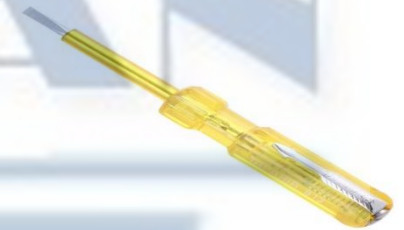


These Line Tester has high quality blade and cellulose acetate plastic Handle. Fully insulated blade ensures shock proof working. Distinct glow of Neon lamp identifies line 'live'. Features a clip for safe carrying in pocket. Available in several sizes.

- B-21, Bhan Nagar, Queens Road, Jaipur-302021
- Website: www.aumshivay.com, www.omengineering.in
- E-mail: admin@aumshivay.com

MULTIPURPOSE DIGITAL LINE TESTER

| PROD. NO. | DIMENSIONS | | | | WT.GMS |
|-----------------------------|------------|-----------|----|-----|--------|
| | A | BxT | C | L | |
| MDT 81 | 20 | 3.0 x 0.5 | 18 | 130 | 17 |
| MDTN 82 (With Neon Bulb) | 20 | 3.0 X 0.5 | 17 | 120 | 14 |

To Measure 12V to 220V AC and DC Voltage. To locate break point of an insulated wire. To check flow of current in an insulated wire from outside.

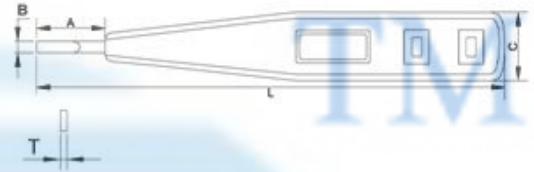

THREE IN ONE TESTER

| PROD. NO. | DIMENSIONS (MM) | | | | |
|--------------------------|-----------------|-----------------|----|------|---------|
| | HANDLE | TIP SIZE BxT | C | L | WT. GMS |
| 817 - 1413 Ext. Cord. | Yellow | 3.5 x 0.5 | 14 | 1200 | 65 |

These Consists of a Line Tester and an easily attachable extension cord with a Test Probe. Easily checks 'live' or Neutral wire, continuity or break in circuit. Identifies two different phases. Ideal for domestic use.

In phase line where board is open lamp hold will not work at 440 V bulb will be damaged where as 3 in 1 tester will indicate this different phase of 440 V by glowing more brightly.

If we get phase from one wire and at the other end bulb does not glow indicate wires are from same phase.

